


Plans for the Construction of
The People's Hive
of Abbé Émile Warré

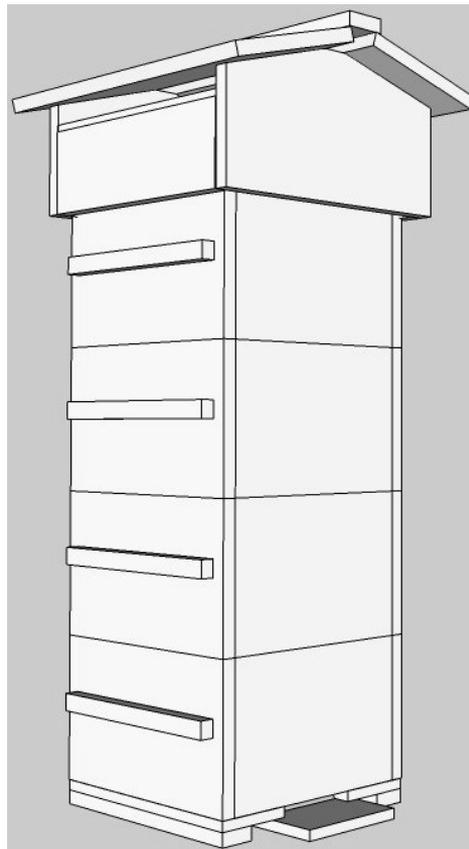

Version 1.2 (Inches), 16 March 2011

© David Heaf, Llanystumdwy, Wales, UK

The author licenses anyone to copy and share, but not modify, this document for non-commercial use. Anyone wishing to use the document for commercial purposes should contact the author to agree terms. Email address: david (at) dheaf.plus.com.

The drawings in this document were compiled with the help of Google SketchUp version 7.1.

The primary download URL of this document is:

http://warre.biobeas.com/warre_hive_plans_imperial.pdf.

If you have downloaded this document from elsewhere, it may not include corrections and updates.

Updates in this version

Two quilt images corrected to slightly smaller than the hive body box. Additional explanatory text to page 5.


Plans for constructing a Warré hive – The People's Hive

The plans shown below are based as closely as possible on those in the 12th edition of *Beekeeping for All* published in 1948.¹ If you think that they deviate in any way from those plans, please let us know via the email address shown on the copyright page. The page numbers in the text refer to the pages in the book.

At the end of this document are included plans for constructing a box with a window according to the modification of Warré's hive introduced by Frères & Guillaume.² We include this variant of the box because many beekeepers, especially beginners, find it helpful for monitoring the progress of colony development. However, we warn that adding windows increases the complexity and expense, not to mention the consumption of resources.

The plans shown here are based on boxes of 3/4 inch (19 mm) thick wood, which is 1 mm thinner than the minimum that Warré regarded as sufficient (p. 52). However, he recommended 24 mm (15/16") for improved rigidity. Thicknesses of 1 1/2" and 2" have also been used in colder climates. Any change to the box wall thickness should ideally retain the internal measurements of 300 x 300 x 210 mm (11 13/16 x 11 13/16 x 8 9/32") and will thus require all other components of the hive apart from the legs to be re-sized.

The hive

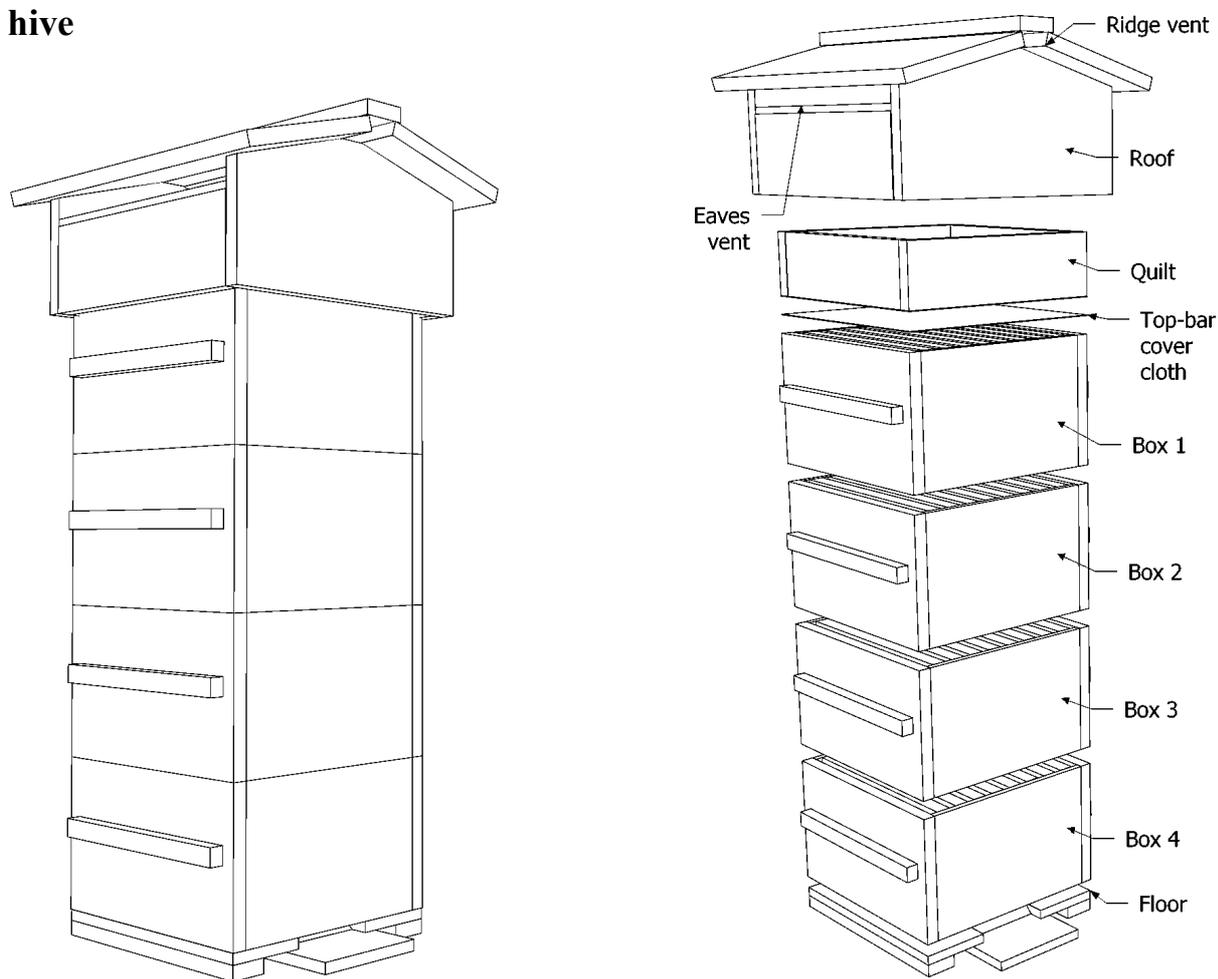



There is no direct passage of air from the top box to the vents under the roof. The quilt is filled with a suitable insulating material of plant origin such as chopped straw, wood shavings, dried leaves etc. As well as a top-bar cover cloth there is a cloth fixed to the bottom of the quilt to retain its contents. A suitable material for these cloths is hessian sacking (burlap).

¹ Warré, É. (2010) *Beekeeping for All*. Northern Bee Books. ISBN 978-1-904846-52-9. Transl. by Heaf, D. J. & Heaf, P. A. from *L' Apiculture pour Tous* 12th edition. (Saint-Symphorien, 1948). <http://warre.biobees.com/bfa.htm>.

² Frères, J-M. & Guillaume, J-C (1997) *L' Apiculture Écologique de A à Z*. Guillaume J-C (ed. & publ.) Villelongue-Dels-Monts.


The quilt

The thickness of the walls of the quilt could be as little as $\frac{3}{8}$ " as it supports only the roof. The authentic Warré quilt is 5 mm smaller than the boxes 'to facilitate working'. This allows the quilt contents retaining cloth to be brought up outside the quilt box, and fixed there without compromising the 10 mm clearance all round inside the roof.

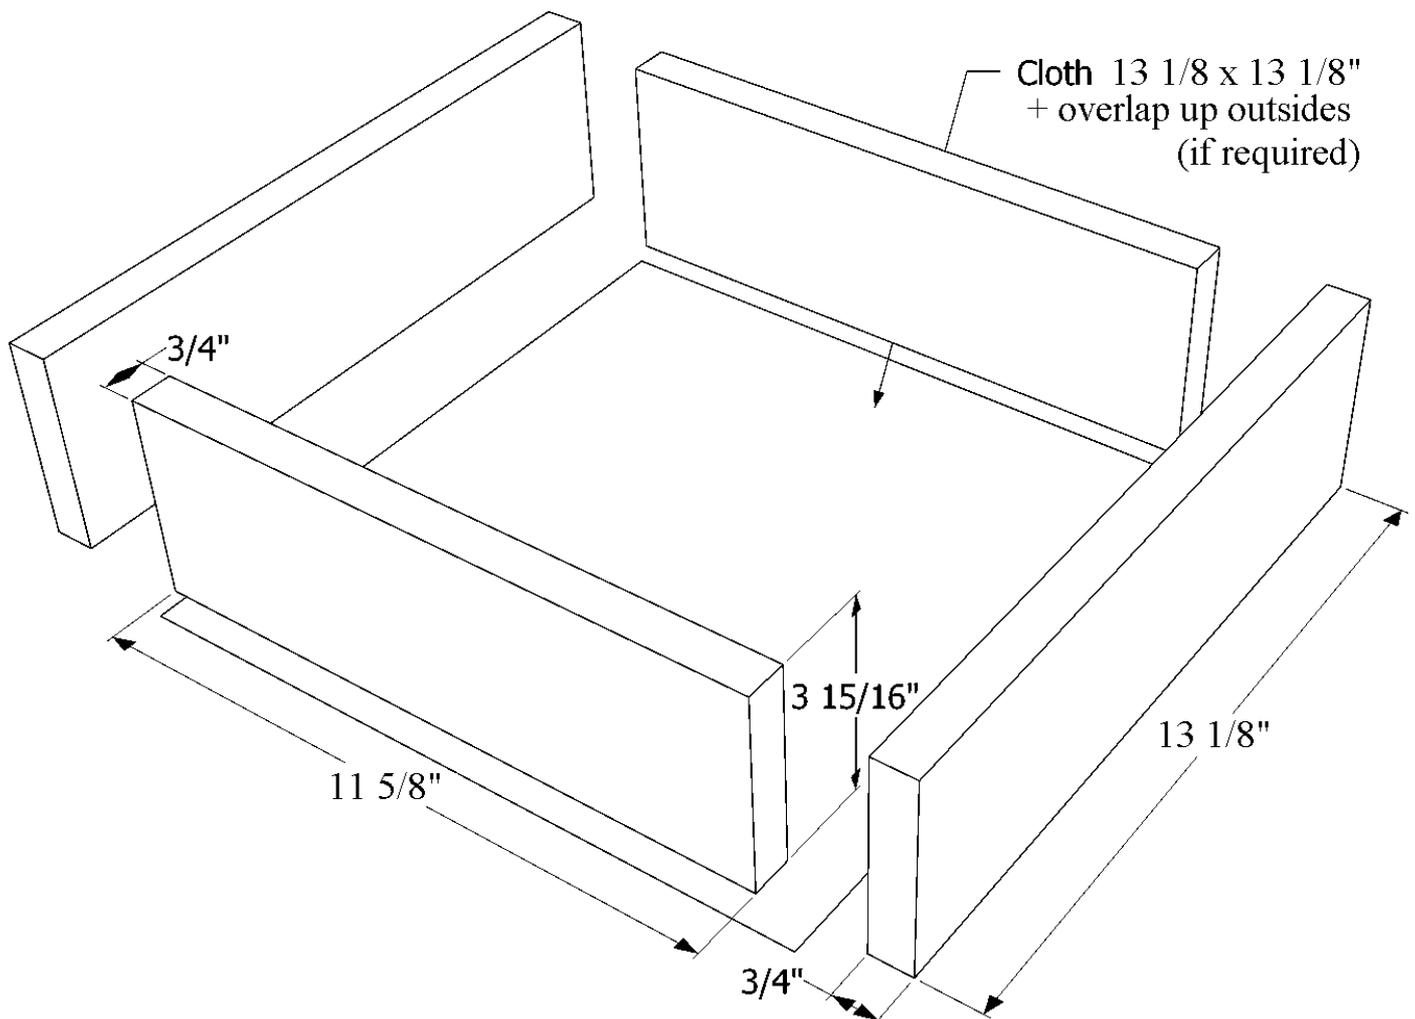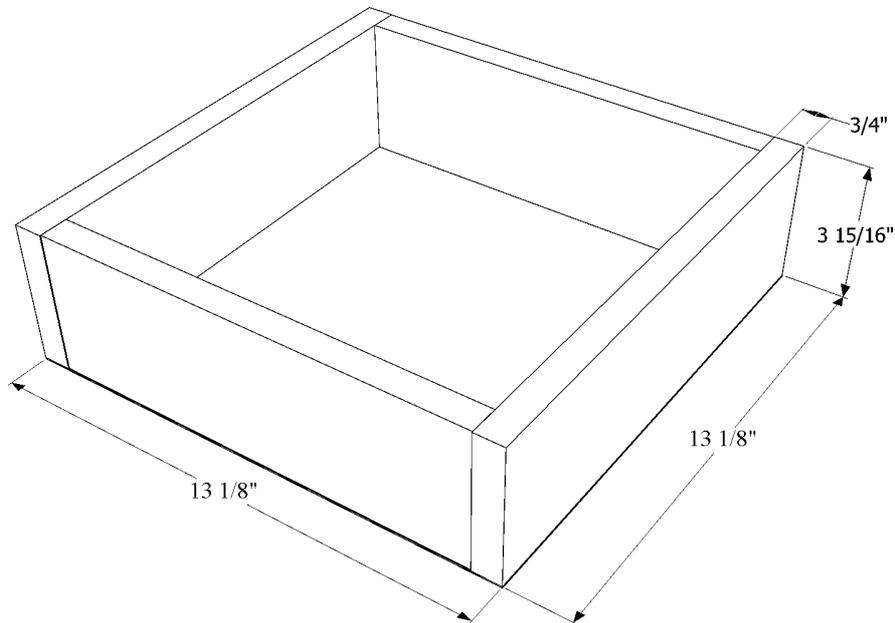


The roof

This is the more complicated of the two roof designs that Warré presents in *Beekeeping for All*. It has a ventilated cavity immediately under the upper surfaces of the roof. This is to dissipate solar heat. Inside is a cover board (or 'mouse board') which rests on the quilt. Thus there is no communication from the quilt to the

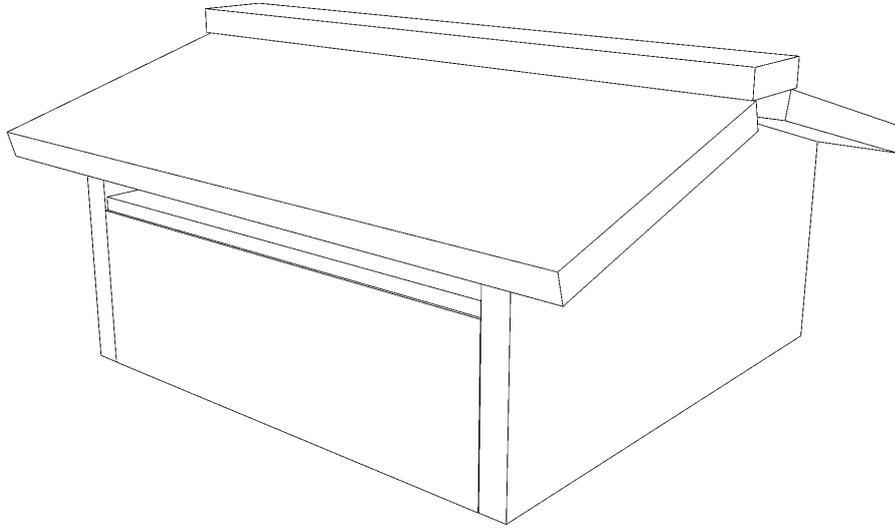


ventilated roof cavity.

The example given here uses $\frac{3}{4}$ " wood for the outer structure. This is based on Warré's plans. Wood of $\frac{5}{8}$ " thickness would be perfectly adequate and make for a lighter roof. There is about $\frac{1}{2}$ " play between the roof inner walls and the quilt outer walls to ease placement and removal of the roof. The horizontal imperial

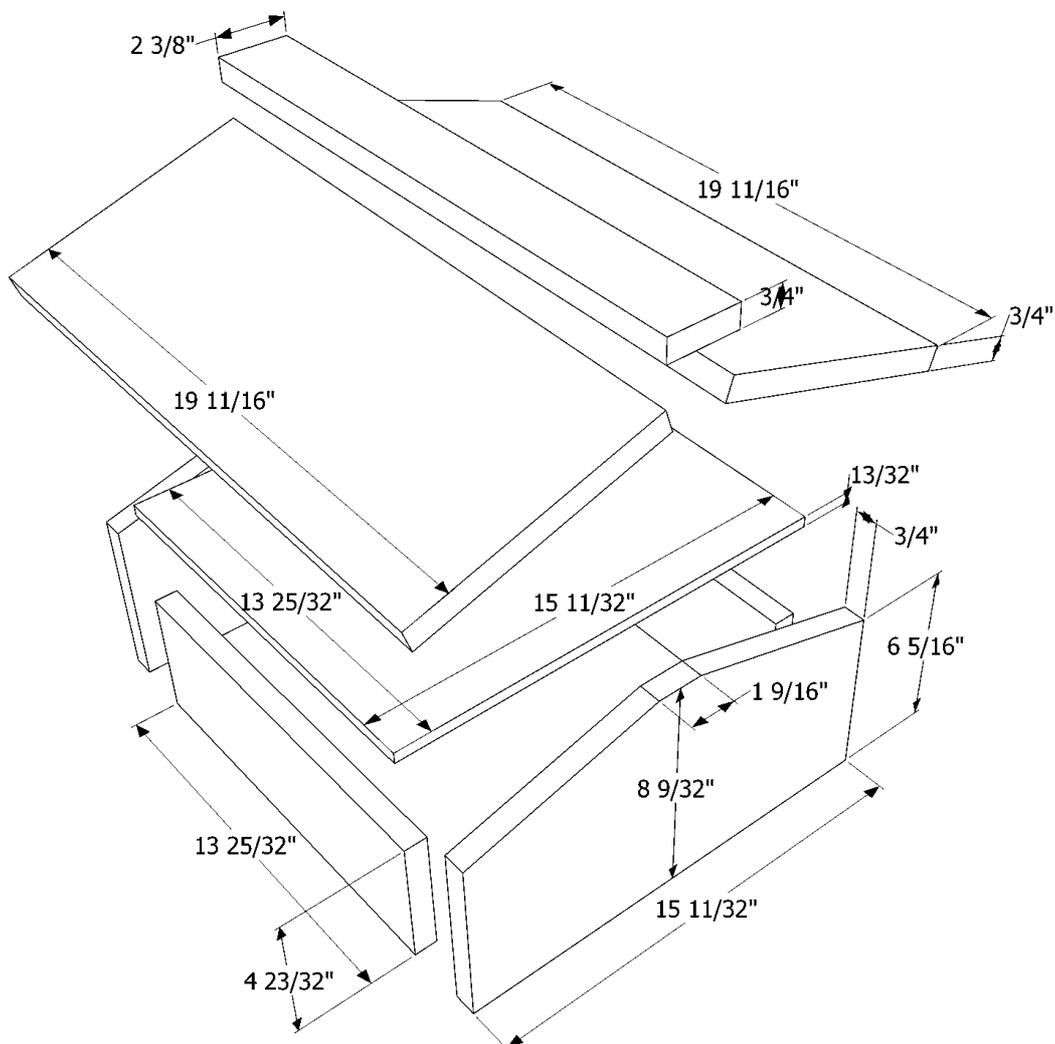


dimensions may be simplified whilst retaining play of at least 1/2".

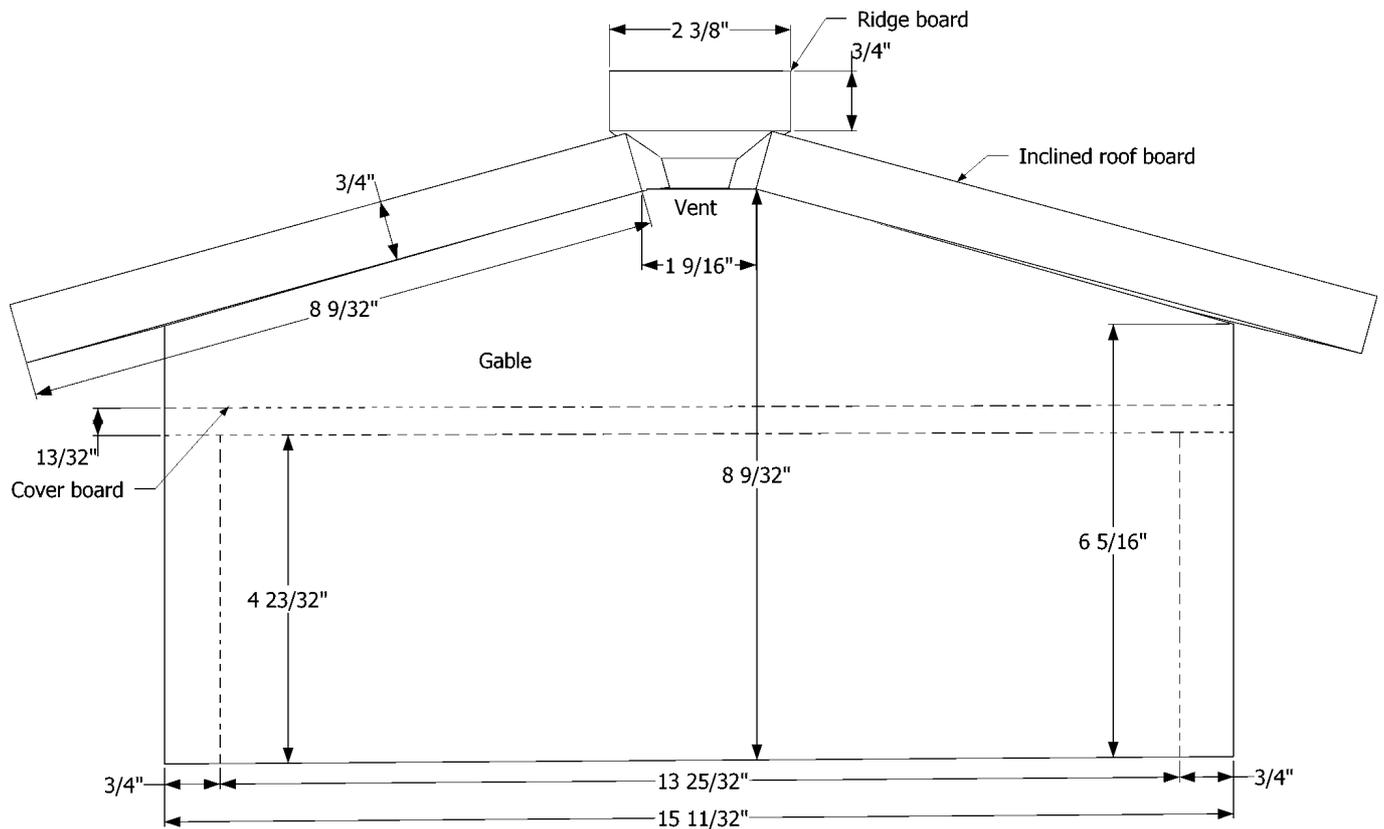


Gable elevation of roof

If thinner wood is used for the inclined boards, they may be nailed to the ridge board from their undersides by supporting the three pieces inverted with blocks suitably positioned to give approximately the correct angle. The unit of three boards is then nailed on to the gables.

The following drawing shows a cut-away view of the quilt in the roof. Note that the lower rim of the roof projects below the junction in which reside the top-bar cloth and the cloth fixed to the bottom of the quilt. This avoids wicking of moisture into that joint. The vertical imperial dimensions may be simplified whilst

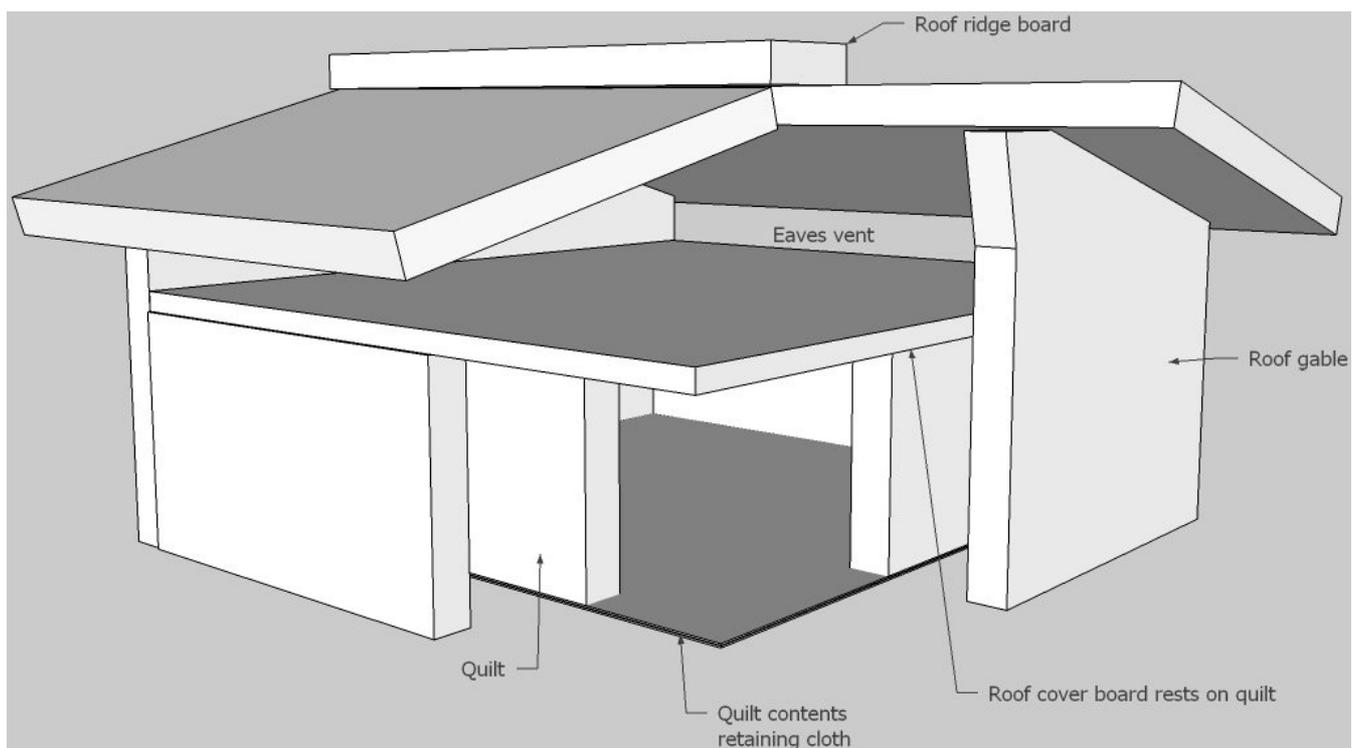

retaining this overlap.

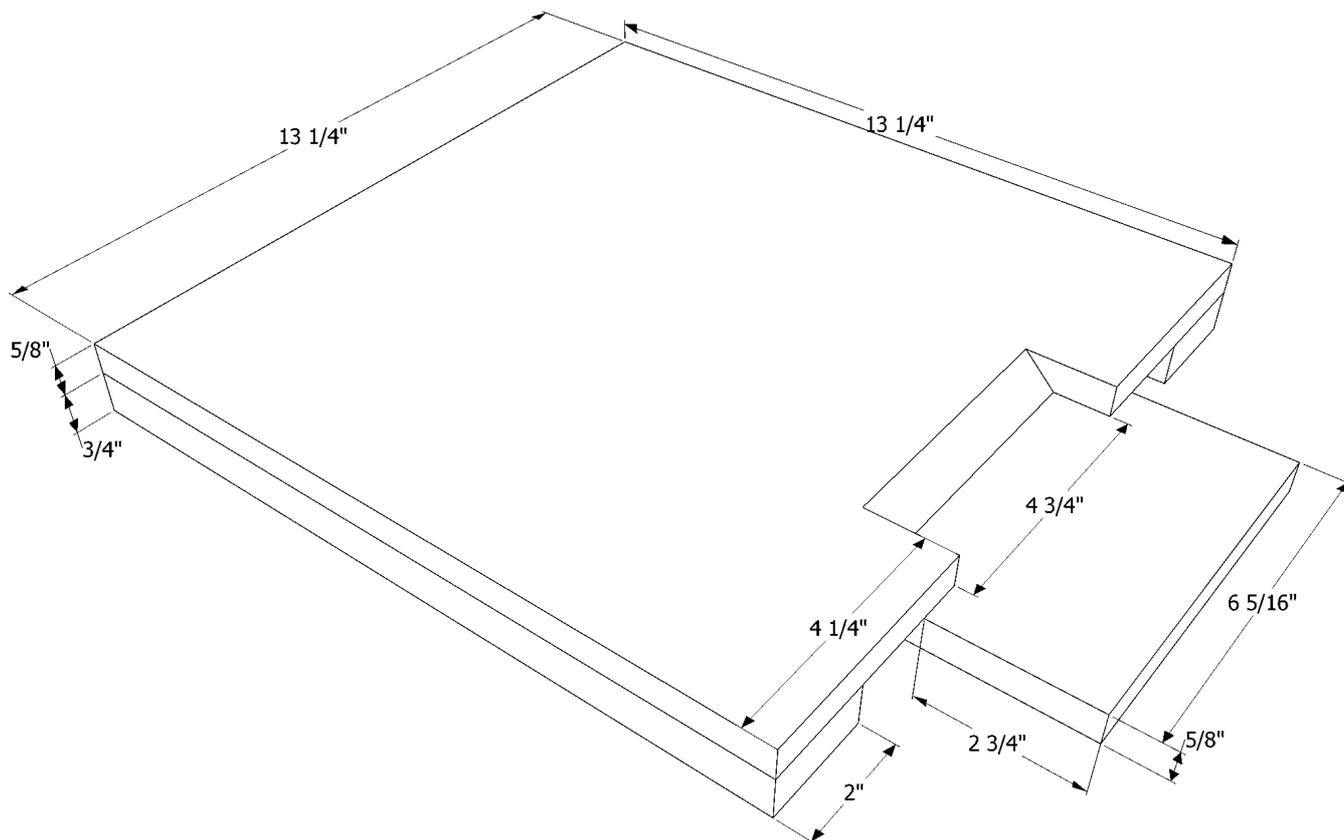


The floor


Warré recommended 15-20 mm (approx. 5/8" to 3/4") for the thickness of the floor. He gave no guidance on the thickness of the battens underneath it.

The notch in the floor serves as the entrance and is 1 1/2" deep for hive walls of 3/4" thickness. If required, the 6 5/16" wide alighting board can extend right to the back of the floor to give the latter added rigidity.

Note that the floor is 1/16" narrower in both horizontal directions compared with a box. Warré suggested

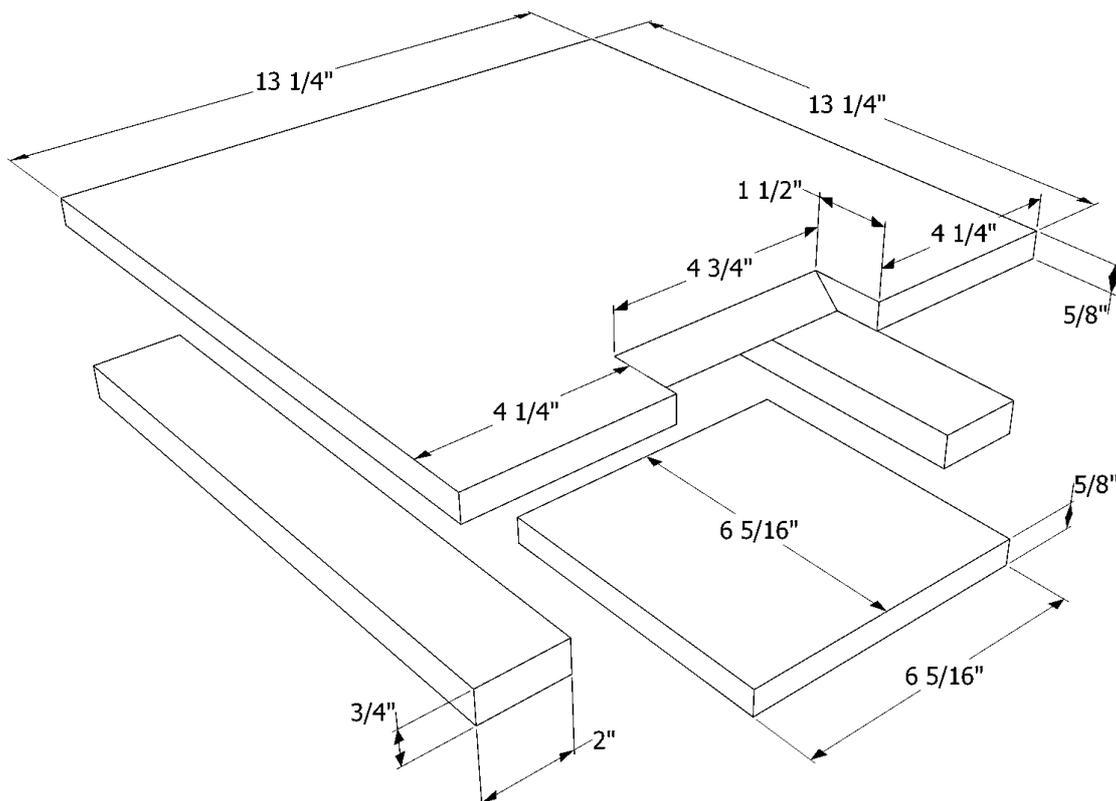

allowing 1 mm all round to promote drainage of rainwater.

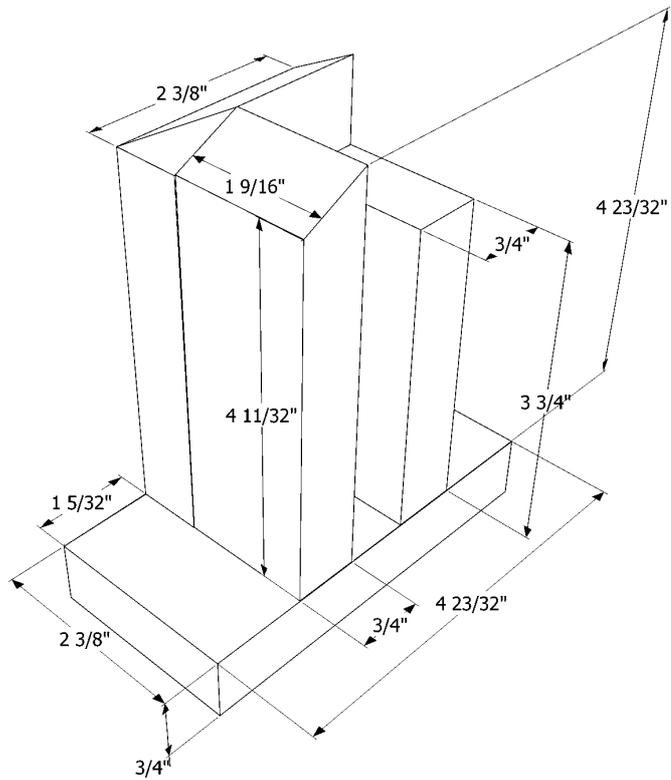


The legs

The leg has a wide foot attached to prevent the hive from sinking into the ground and possibly toppling. Furthermore it gives a 3/4"-1 5/32" projection outside the footprint of the floor, thus greatly increasing stability.


The leg places the hive entrance relatively close to the ground compared with beekeeping practice in general. However, Warré regarded a low entrance as important, as can be seen on pages 46-48.

In the above drawing, the right hand pillar of the leg has the underside of the floor resting on it. The angled left hand pillar is nailed from both sides to the side of the floor with a total of four nails. The difference in height of the right and left pillars is approximately 1" which will work for the floor corner overall thickness of 1 3/8" shown above. If the floor corner is less than 1" thick, then the right pillar should be lengthened

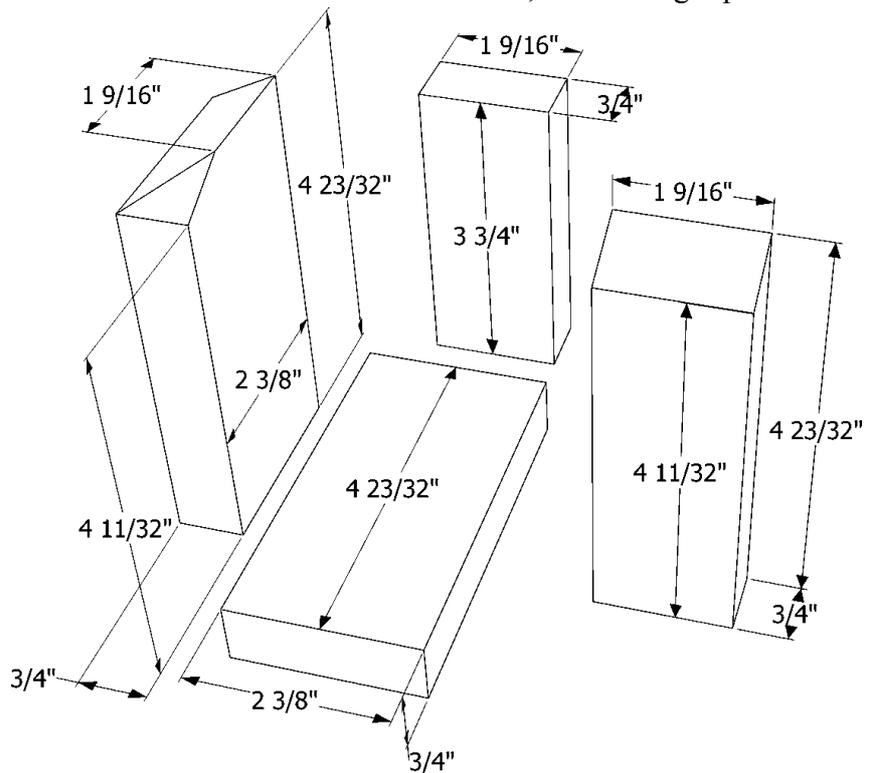

accordingly. The feet may be arranged in a pinwheel (Catherine-wheel) arrangement or constructed as two mirror symmetrical pairs and placed in mirror symmetry accordingly.

Box with window

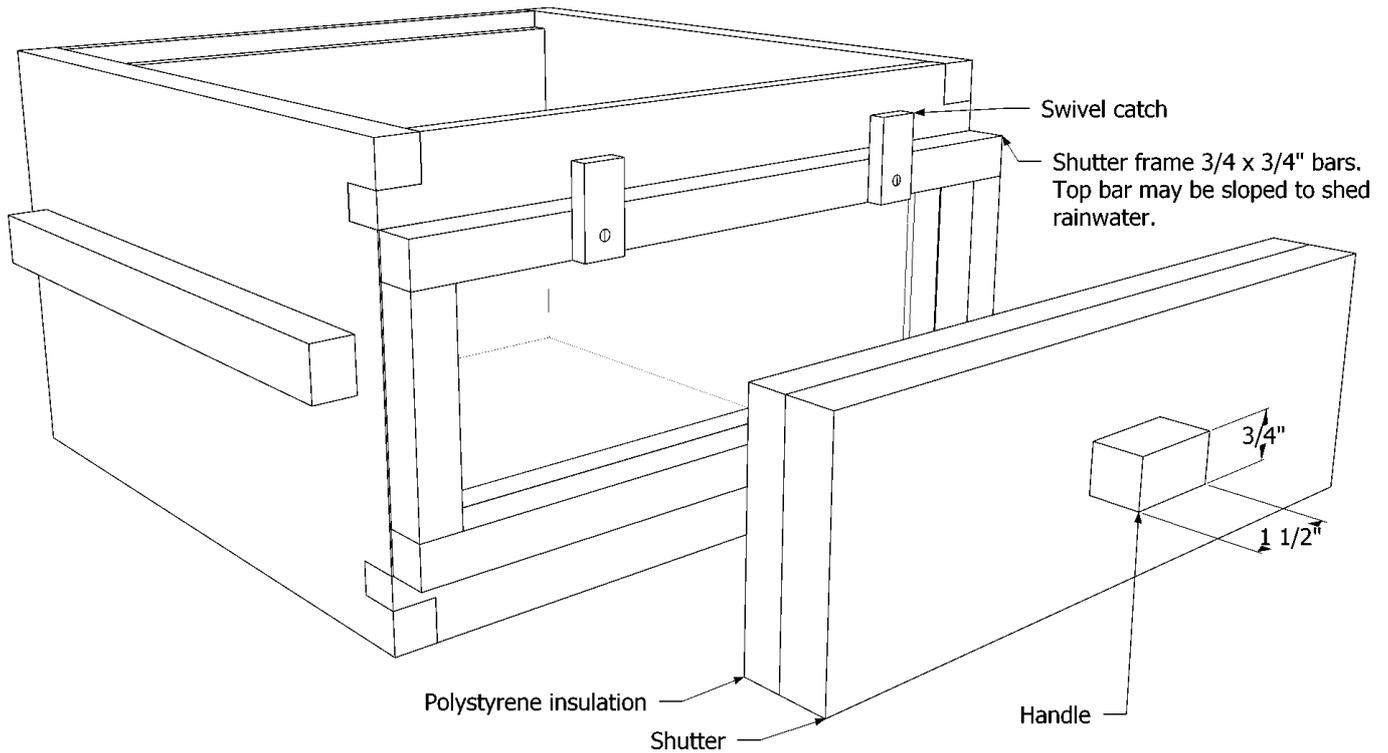

This is based on the design by Frères & Guillaume.³

Frères & Guillaume specified 24 mm (15/16") thick wood for their box. This version is based on the 3/4" (19 mm) thick plank commonly available.

This design places the insulation flush against the glass, the depth of the cavity exactly matching the depth of the shutter. In order to minimise jamming of the shutter in wet conditions, it may be made slightly smaller in each direction.

Glass of the 1/8" (3.175 mm) thickness that is commonly available in the USA has been selected. Frères & Guillaume specified 4 mm.

In this version, the window frame bars are jointed to the box walls with mortise and tenon joints. Alternatively, butt joints with three nails at each joint should give satisfactory service.

³ Frères, J-M. & Guillaume, J-C (1997) *L'Apiculture Écologique de A à Z*. Guillaume J-C (ed. & publ.) Villelongue-Dels-Monts.

